
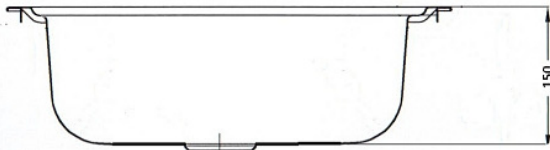
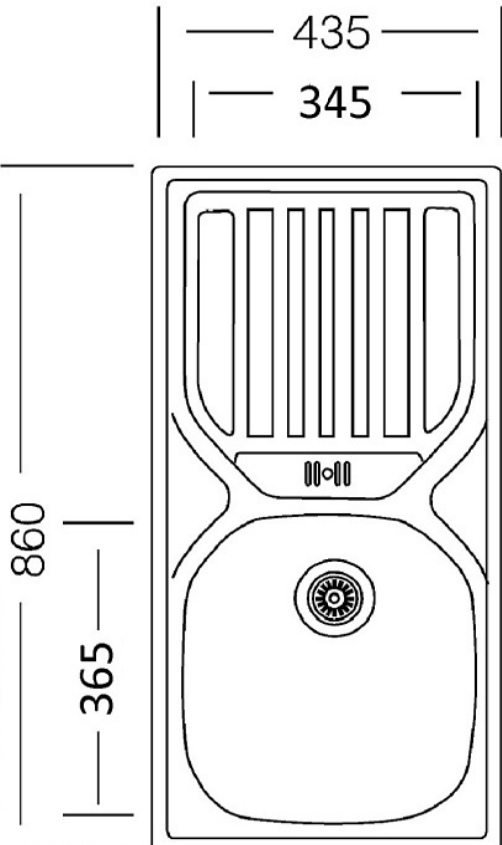


00.7100.23

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20

21
22
23
24
25
26
27
28
29
30
31
32
33
34

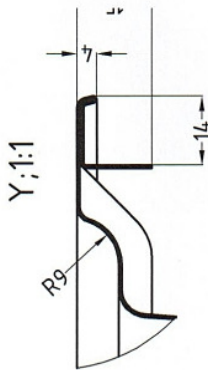

Dopustni odstopki netoleriranih dolžinskih mer v mm ISO 2768											
Razred točnosti	0.5	≥3	Področje inženjskih mer v mm								
			±6	±30	±120	±400	±1000	±2000			
f (final)	3	6	±0.05	±0.05	±0.1	±0.15	±0.2	±0.3	±0.5	-	
			±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2	
m (srednja)											

Operacija		št. orodja	
Obdelava		-	
Material:		SIST EN 10088-2	
Netol. mer.		ISO 2768-m	
Netol. koti		ISO 12.1.99	
Konslfr.		Rical	
Pregled.		Odobrila	
Ozn.		Dne	
Naziv		Einbauspüle SPEED SP 860.430	
Koda:		448292	
Klasifikacija:		Nadomestila:	
1/1		-	