
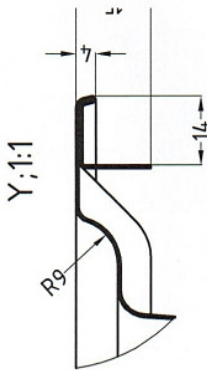


Dopustni odstopki netoleriranih dolžinskih mer v mm ISO 2768									
Razred točnosti	0.5	±3	Področje inženjskih mer v mm						
	3	6	do 30	30	120	400	1000	2000	>2000
f (final)	±0.05	±0.05	±0.1	±0.15	±0.2	±0.3	±0.5	-	-
m (srednja)	±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2	±2

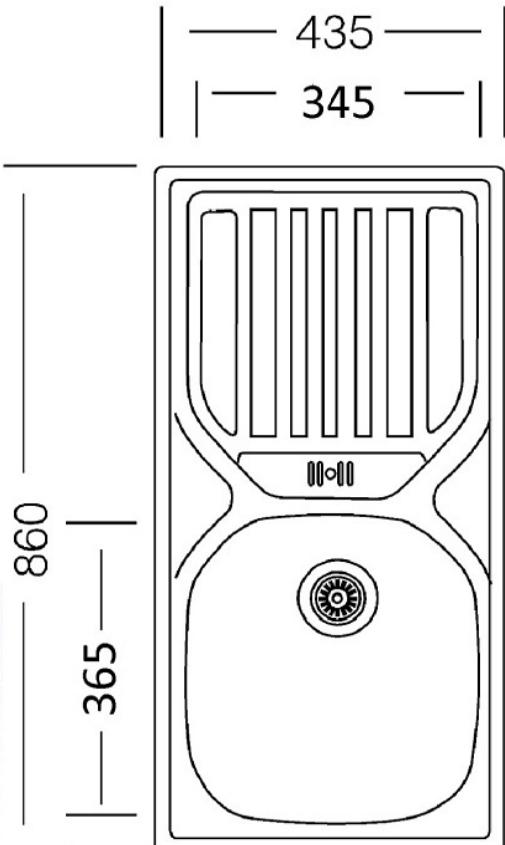

Operacija		št. orodja	
Obdelava		-	
Netol. mer.		Material:	
ISO 2768-m		SIST EN 10088-2	
Konstr.		1.4301+2R	
B1 1.3.06		Risol	
A0 12.1.99		Prejeto	
Dzn. Dne		Sprememba	
Naziv		Koda:	
Einbauspüle SPEED SP 860.430		448292	
Klasifikacija:		Nadomestila:	
		1/1	