
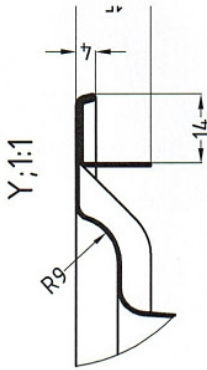


00.7100.23

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20

21
22
23
24
25
26
27
28
29
30
31
32
33
34

Dopustni odstopki netoleriranih dolžinskih mer v mm ISO 2768									
Razred točnosti		Področje inženjskih mer v mm							
		0.5	≥3	≤6	≤30	≤120	≤400	≤1000	≤2000
m (srednja)		±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2
f (fina)		±0.05	±0.05	±0.1	±0.15	±0.2	±0.3	±0.5	-

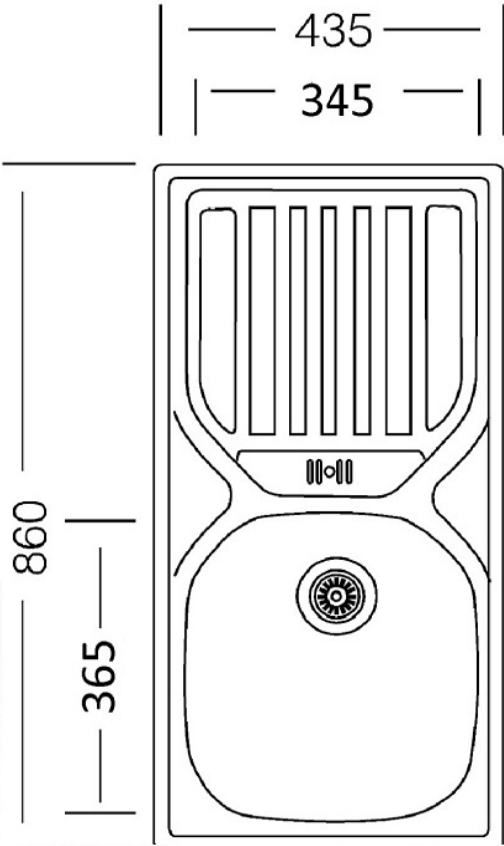

Operacija		št. orodja	
Obdelava		-	
Netol. mer.		ISO	
2768-m		2768-m	
Konslr.		12.1.99	
B1		1.3.06	
A0		12.1.99	
Dzn.		Dne	
Dne		Sprememba	
Dne		Odobril	
Naziv		Koda:	
Einbauspüle SPEED SP 860.430		448292	
Klasifikacija:		Nadomestila:	
1/1		1/1	